

## SingleStep<sup>®</sup>

### Heat-Activated Adhesive Foam Board in White and Black

#### EnCore<sup>®</sup> Foam Board Drives Value and Productivity


These foam boards are pre-coated on one side with specially formulated, heat-activated adhesive. SingleStep<sup>®</sup> speeds up the mounting process by eliminating the time-consuming measuring, cutting, and tacking of dry mounting tissue. Lower heat and pressure activate the specially formulated adhesive for risk-free bonding.

#### Features and Benefits

- Ultra smooth, brilliant white surface features a clay coating and also available in Black-on-Black
- Saves work, saves time, saves steps for increased production safety and efficiency
- Easy to use; simply remove the release paper, position image, replace release paper and place into press
- “Memory” Core bounces back after handling or cutting
- Mounts without subjecting artwork to potentially damaging temperatures
- We do not recommend SingleStep<sup>®</sup> for resin coated (RC) photographs

#### Applications

- Art bonds in minutes at a safe operating temperature of 180° F
- A variety of sizes in 1/8" or 3/16" thickness
- Can be used in dry mount press or roller laminator
- Adhesive is pH neutral
- Permanent bond

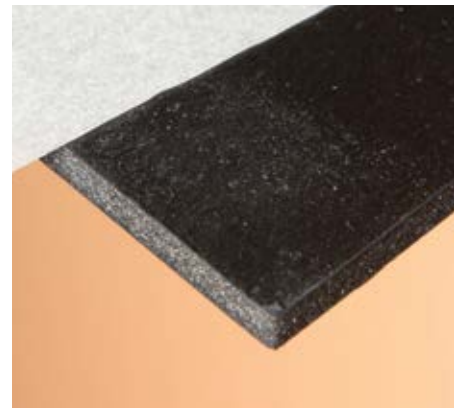

**EnCore<sup>®</sup> SingleStep<sup>®</sup> Foam Board Specifications**

Item Number	Thickness (inches)	Sheet Size (inches)	Sheets Per Case	Sq. Feet Per Sheet	Sq. Feet Per Case	Cases Per Pallet
<b>White SingleStep</b>						
900-921	1/8"	32x40	25	8.89	222.25	10
900-922	1/8"	40x60	25	16.67	416.75	10
900-905	3/16"	24x36	25	6.00	150.00	20
900-901	3/16"	32x40	25	8.89	222.25	10
900-902	3/16"	40x60	25	16.67	416.75	10
901-415	3/16"	48x96	25	32.00	800.00	10
<b>Black-on-Black SingleStep</b>						
905-111	3/16"	32x40	25	8.89	222.25	10
905-112	3/16"	40x60	25	16.67	416.75	10
905-113	3/16"	48x96	25	32.00	800.00	12

**MOUNTING REFERENCE GUIDE**

Foam Board	Image	Temperature	Vacuum Press	Mechanical Press
SingleStep	Poster	180°F	3 minutes	2 minutes
SingleStep	Newsprint	180°F	3 minutes	2 minutes
SingleStep	Magazine Pages	180°F	3 minutes	2 minutes
SingleStep	Fabric	180°F	3 minutes	2 minutes

- This foam board is not recommended for resin-coated (RC) photographs.
- Recommended temperature and dwell time should be used as a guideline. The best combination could vary depending on size and humidity. As a rule, increase dwell time before increasing temperature.



**ENCORE<sup>®</sup> Products**  
a division of Newell Office Brands  
2020 West Front Street  
Statesville, NC 28677

**Customer Service:** 800-873-4868  
**Fax:** 704-871-8671  
**Hrs.** 8:30 am – 5:00 pm (EST)  
www.encoreproducts.com  
©2019 Newell Brands, Inc.

Newell makes no warranty of any kind, expressed or implied as to merchantability, fitness for a particular purpose or in any other manner with respect to EnCore<sup>®</sup> Foam Boards. The product is not recommended for outdoor use. **Flammability:** EnCore Foam Boards are combustible and may constitute a fire hazard if improperly handled. Do not expose to an open flame or other ignition source.